



Quick-Release Installation


For Classic Lounger, Wrap-Around, and Standard Quad Trunk models only

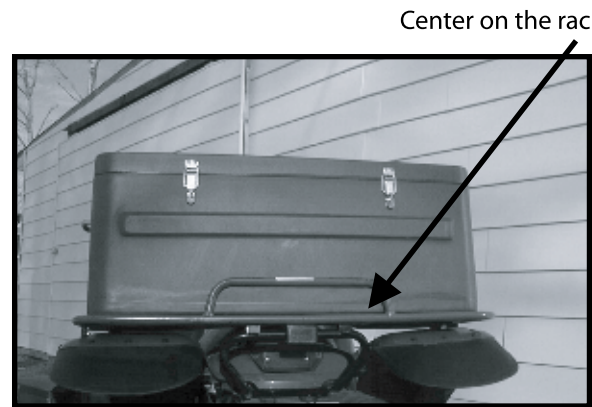


Put bracket about 1 inch from any vertical tube within the *inside* boundaries to prevent sliding.

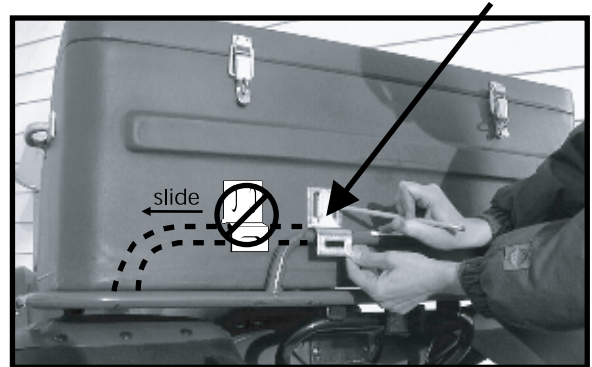

Keep holes in a straight line.

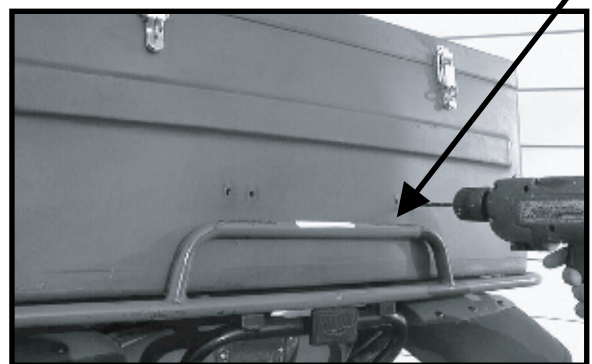

Back of bolts fit firmly into slot.

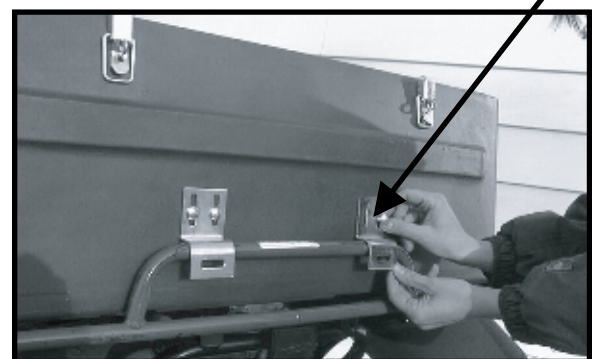

PACKAGE CONTENTS:

- 2 qty Quick-Release Straps
- 1 Handle Set (optional mount for box)
- 2 Stamped Front Brackets**
- 8 qty 10/24 x 3/4 button head 8 qty 10/24 lock nut
- 1 1/8" short arm hex key
- 2 Stamped Rear Brackets**
- 4 qty 1/4-20 x 3/4 bolt 4 qty 1/4 x 1 fender washer
- 4 qty 4/4-20 nylock nut

* Find Step 1 on separate half sheet *


Step 2. Place the Tamarack Quad Trunk* on the back rack of your Quad with the trunk touching the back rung of your back rack.

Step 3. Place the back bracket onto the trunk with the curved portion of the bracket resting on the back rung. To position holes for the bracket, mark the center of the slot.


Step 4. After marking all four positions for holes, drill with a 1/4 inch bit at marked points.

Step 5. Place bolts through bracket and pre-drilled holes on the trunk. Adjust brackets so the curved portion of the bracket rests on the back rung.

View from inside the trunk.

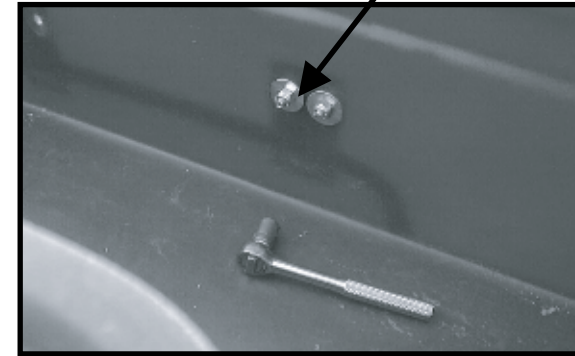

This buckle to the rear.

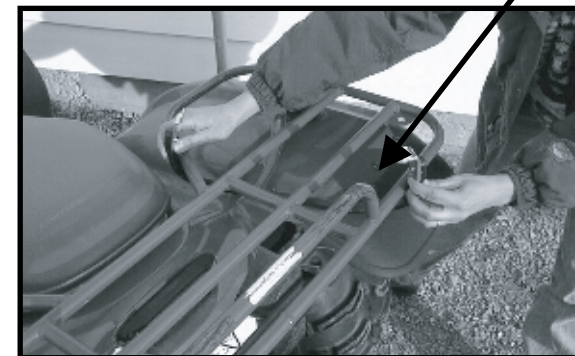



Step 6. Attach washers, then nuts, and tighten to secure back bracket onto trunk.

DO NOT OVERTIGHTEN!

Step 7. Place straps under the back rack. Make sure the larger "L-shaped" strap end is at the back.

Step 8. Attach small strap end to the front of the trunk.

Step 9. Attach the large "L-shaped" strap end through the slot in the bracket you have just mounted. Be sure the strap is pulled tightly.

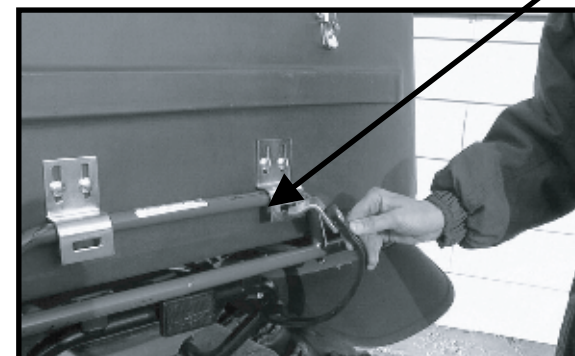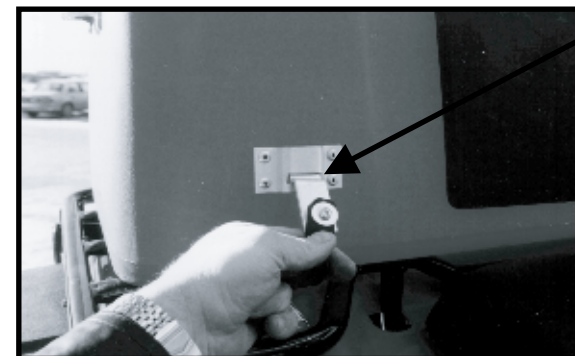

Tamarack ATV Accessories are not designed or intended for passenger use. Obey all ATV manufacturer's restrictions and laws!